



- |   |  |
|---|--|
| 1 | DEMOLISH 5" CHILLED WATER SUPPLY AND RETURN PIPING FROM UNIT BACK TO LOCATION AS DEPICTED. |
| 2 | DEMOLISH COOLING COIL CONDENSATE PIPING FROM UNIT TO FLOOR DRAIN.                          |
| 3 | DEMOLISH MEDIUM PRESSURE STEAM CONDENSATE PIPING. CAP AT MAIN.                             |
| 4 | DEMOLISH MEDIUM PRESSURE STEAM PIPING FROM UNIT BACK TO MAIN AND CAP. RE-INSULATE CAP.     |
| 5 | EXISTING MEDIUM PRESSURE STEAM CONDENSATE MAIN TO REMAIN.                                  |
| 6 | DEMOLISH DRAIN PIPE FROM HUMIDIFIER DRAIN PAN.   |

- ① CONNECT 2-1/2" MPS AND 1-1/2" MPR TO NEW HUMIDIFIER.
- ② CONNECT 4" CHR AND CH FROM 6" MAIN TO COOLING COIL. PROVIDE SPECIALTIES AS REQUIRED OR AS DEPICTED ON DETAILS.
- ③ ROUTE COOLING COIL CONDENSATE THROUGH P-TRAP TO EXISTING FLOOR DRAIN. SIZE TO BE 2".
- ④ BALANCE TO 100 GPM.
- ⑤ TEMPERATURE CONTROL CONTRACTOR TO RE-PROGRAM AND CALIBRATE EXISTING 70-AFMS-1 AND 2.
- ⑥ CONTRACTOR TO CUT AND DEPRESS EXISTING SLAB WITH 2" LIP TO GET THE REQUIRED TRAP DEPTH, SEE ARCHITECTURAL PLANS FOR DETAILS.
- ⑦ CONTRACTOR TO PROVIDE NEW DDC VALVES ON EXISTING STEAM PRE-HEAT COIL, ENERGY RECOVERY COIL AND REHEAT COIL. FIELD VERIFY EXACT LOCATION OF EXISTING VALVES BEING REPLACED WITH DDC.
- ⑧ OPTION 1: PROVIDE ALL NEW DDC TEMPERATURE CONTROLS FOR THE EXISTING CONSTANT VOLUME DUAL VAV BOX SERVED BY THE SPS 70-AHBSW-11.

GENERAL CONTRACTOR AND/OR AJSUBCONTRACTORS SHALL FIELD VERIFY ALL DIMENSIONS SHOWN ON THESE PLANS AND SHALL BE RESPONSIBLE FOR VARIATIONS BETWEEN PLAN DIMENSIONS AND ACTUAL FIELD DIMENSIONS. WHERE VARIATIONS ARE FOUND TO OCCUR, THE GENERAL CONTRACTOR SHALL BE RESPONSIBLE FOR CORRECTING THE SAME. NO ADJUSTMENT TO THE WORK WILL BE MADE WITHOUT THE PRIOR APPROVAL OF THE PROJECT ENGINEER.


GENERAL CONTRACTOR SHALL BE RESPONSIBLE FOR GENERAL DEMOLITION INCLUDING REMOVAL OF WALLS, PARTITIONS, DOORS & CEILING & FLOORS, ANY AND ALL CUTTING OF CONCRETE FLOORS, WALLS OR STRUCTURE SHALL BE THE GENERAL CONTRACTOR'S RESPONSIBILITY. THE GENERAL CONTRACTOR SHALL BE RESPONSIBLE FOR THE PROTECTION OF ALL EXISTING UTILITIES. THE RESPONSIBILITY OF THE SUBCONTRACTOR BY TRADE; FIRESTOPPING OF THESE OPENINGS SHALL BE DONE BY THE RESPECTIVE TRADE. THE GENERAL CONTRACTOR SHALL BE RESPONSIBLE FOR THE PROTECTION OF ALL EXISTING UTILITIES. THE GENERAL CONTRACTOR, PATCHING AND REPAIR OF CONCRETE WALLS, FLOOR, OR STRUCTURE SHALL BE THE RESPONSIBILITY OF THE GENERAL CONTRACTOR; THIS WILL BE ACCOMPLISHED UPON COMPLETION OF THE INSTALLATION OF ANY AND ALL UTILITIES INSTALLED.

**DUNHAM** 

**Dunham Associates, Inc.**  
50 South Sixth Street / Suite 1100  
Minneapolis, Minnesota 55402-1540

PHONE 612.465.7550 FAX 612.465.7551  
WEB [dunhameng.com](http://dunhameng.com)

**mechanical + electrical consulting engineering**

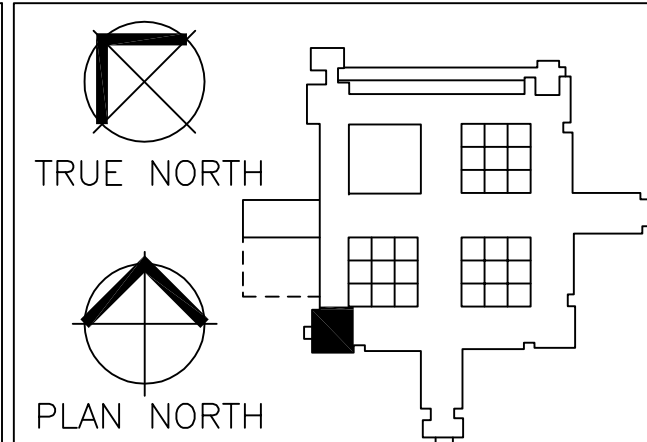

Drawing Scale	AS NOTED
Plot Scale	12" = 1'-0"

Approved: Cynthia Doolittle, Chief, Projects Section
Approved: Steven Challeen, Director, Engineering

Date  
08/13/2012

DRAWING NO.  
**1260-M1**



Department of  
Veterans Affairs